


# ROCKCOTE COATINGS COMMERCIAL

# DINCEL STRUCTURAL WALLING

AS 1530.1

For a building of Type A or B construction, C2D10 (1) specifies that elements of external walls, including their components, must be non-combustible.

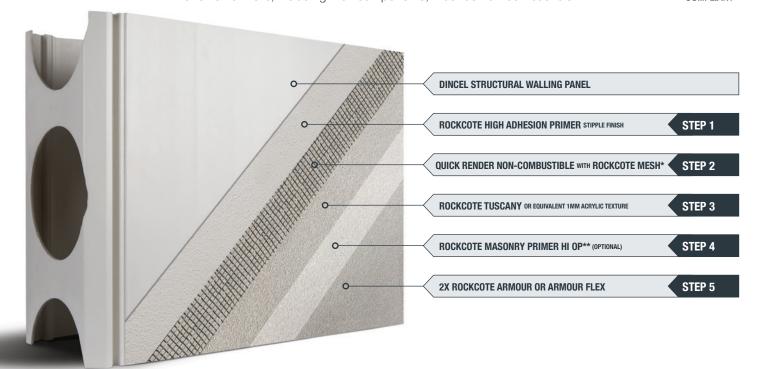

## The Dincel-Rockcote Coating System

SUBSTRATE	BASE COATS		TEXTURE	PROTECTION	
DINCEL Structural Walling	ROCKCOTE High Adhesion Primer	ROCKCOTE QUICK RENDER NON-COMBUSTIBLE WITH ROCKCOTE MESH	ROCKCOTE TUSCANY	ROCKCOTE MASONRY PRIMER**	2X ROCKCOTE Armour or Armour Flex
	ROCKCOTE	ROCCCOTE  ORENDER  20kg	ROCCOTE TUSCANY TROWEL ON	ROC(COTE PRIMER	ROCCOTE
	STEP 1	STEP 2	STEP 3	STEP 4	STEP 5

# A Rockcote specification for a Dincel Structural Walling system includes detailed step-by-step instructions from

preparation of the Dincel substrate to the final finished coat. \*Rockcote mesh 4x5mm / 160gsm. This product is certified as non-combustible passing NATA accredited testing for AS1530.1.

#### **BCA Combustibility Compliance**

Rockcote products Deemed-to-Satisfy solution for buildings of Type A and Type B construction by non-combustible external walls (C2D10) and exempt elements: (C2D10)(4)(o) under the National Construction Code, Volume One.

# Contact ROCKCOTE for a detailed specification on 1300 736 668



Phone. **1300 736 668**Email. enquiries@rockcote.com.au
www.rockcote.com.au




Phone. **02 9670 1633** Email. enquiry@dincel.com.au **www.dincel.com.au** 

 $<sup>^{\</sup>star\star}$  Masonry Primer Hi Op is recommended on large broad wall areas to ensure uniform coverage and colour consistency.



# **DINCEL STRUCTURAL WALLING**

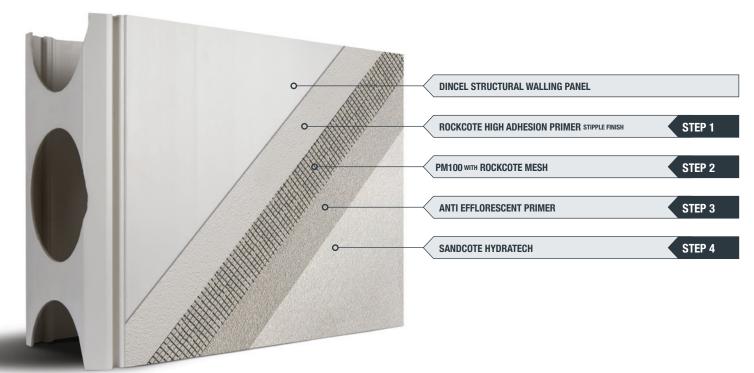

## The Dincel-Rockcote Coating System

SUBSTRATE	BASE COATS		TEXTURE	PROTECTION
DINCEL Structural Walling	ROCKCOTE HIGH ADHESION PRIMER	ROCKCOTE PM100 WITH ROCKCOTE MESH	ANTI EFFLORESCENT PRIMER	ROCKCOTE SANDCOTE HYDRATECH
	ROCCCOTE	ROCKCOTE  PM 100 ORENDER  SOC 2009	ROCKCOTE	ROCKCOTE SUCCESSION OF COLOURED RENDER
	STEP 1	STEP 2	STEP 3	STEP 4

A Rockcote specification for a Dincel Structural Walling system includes detailed step-by-step instructions from preparation of the Dincel substrate to the final finished coat. Each specification is eligible for a 15 year system warranty when applied in accordance with the relevant technical specifications.

Contact ROCKCOTE for a detailed specification on 1300 736 668





